


Greenwood S Vent Slotvents

The Greenwood S Vent is a discreet through-frame Slotvent that provides background ventilation in line with the requirements of the current Building Regulations ADF 2010. These slot vents are widely specified in social sector window replacement programmes to provide effective ventilation, while reducing mould and condensation. With a choice of 3 sizes, 3 control options and a wide range of colours, there's an S vent variant to suit every need.

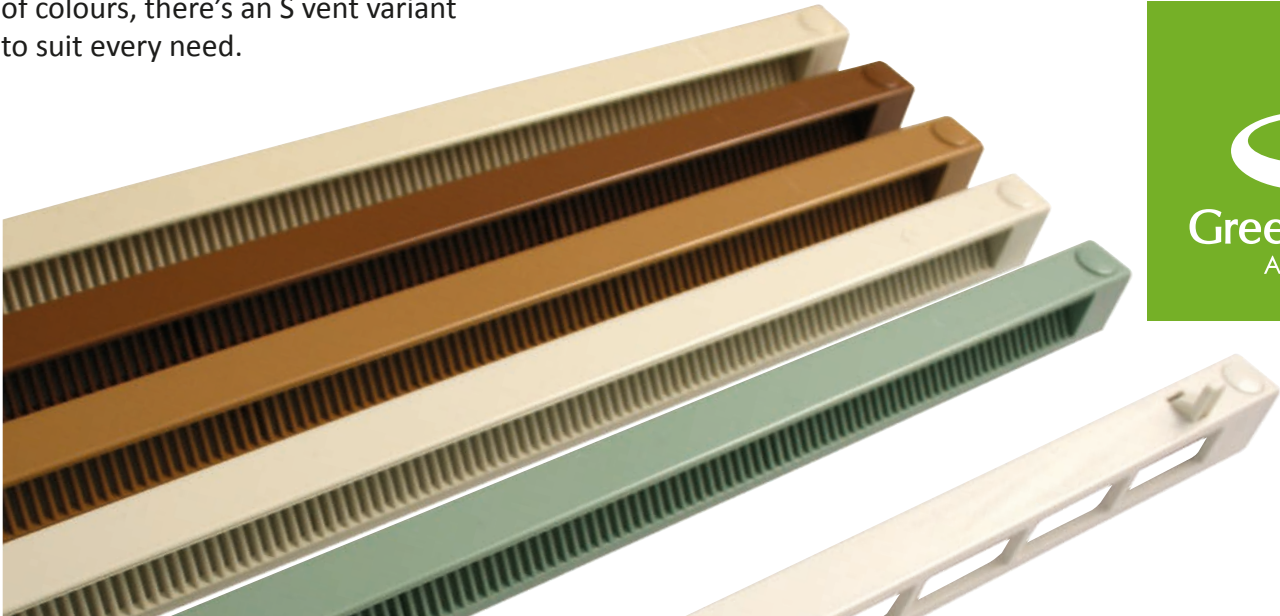


Features and benefits:

- Available in 3 sizes - dimensions in mms (l x h x d): **3000S** (305x22x23), **4000S** (400x22x23) & **6000S** (550x22x23)
- Offers up to 4200mm² equivalent area
- Front, bottom or pull cord operation
- Widely specified within the social sector
- Optional sleeve available to help improve window integrity
- Provides background ventilation in line with current Building Regulations ADF 2010

Control options



Finish options

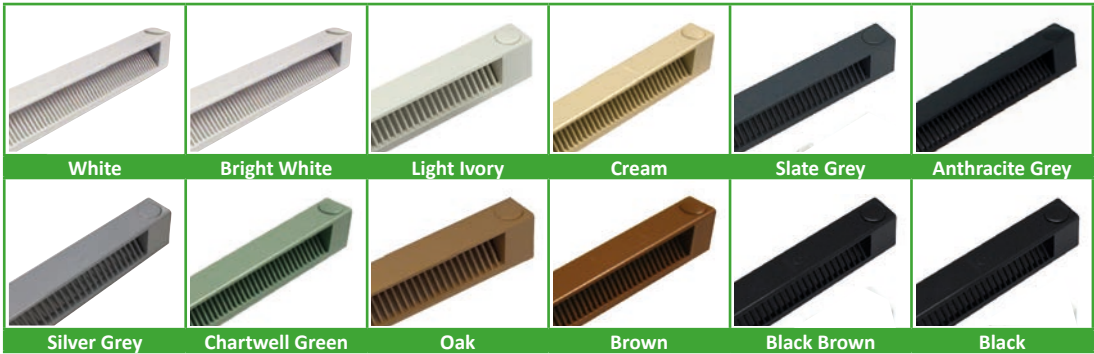

Greenwood S Vent Slotvents


Ordering Details

FINISH (INNER/OUTER) SF	305mm 3000S	400mm 4000S	550mm 6000S	BOX QTY.
White / White	VEN10001	VEN40003	VEN40004	50
Bright White / Brilliant White	VEN10001B	VEN40003B	-	50
White / Black Brown	VEN37019	VEN47019	-	50
White / Brown	-	VEN49013	-	50
White / Cream	VEN37013	VEN47013	-	50
White / Chartwell Green	-	VEN47017	-	50
White / Anthracite Grey	VEN10011	VEN47016	-	50
White / Silver Grey	VEN37018	VEN47018	-	50
White / Slate Grey	VEN37015	VEN47015	-	50
White / Light Ivory	VEN37014	VEN47014	-	50
White / Irish Oak	-	VEN47012	-	50
Brown / Brown	VEN10091	VEN49003	VEN49004	50
Anthracite Grey / Anthracite Grey	-	VEN46000	-	50
Silver Grey / Silver Grey	-	VEN47008	-	50
Ivory / Ivory	-	VEN47004	-	50
Oak / Oak	VEN10081	VEN48003	-	50
S with Pullcord				
White / White	VEN3000SPC	VEN4000SPC	-	50
SB				
White / White	VEN20001	VEN40001	-	50
White / Black	VEN25015	VEN48015	-	50
White / Brown	VEN29011	VEN49011	-	50
White / Oak	VEN28011	VEN48011	-	50
Black / Black	VEN25005	VEN45001	-	50
Brown / Brown	VEN29001	VEN49001	-	50
Oak / Oak	-	VEN48001	-	50



Performance

BS EN 1026: 2000 Air Permeability			BS EN 1027: 2000 Watertightness		BS EN ISO 717-1: 1997 Airborne Sound Insulation (dB)
Window vent	@ 50Pa (m3/hr)	@ 50Pa (l/s)	Pressure at no leakage (Pa)	Classification	Dn,e,w (dB) Open
3000S	1	0.27	500	E4	35
4000S	4	1.11	500	E4	33
6000S	10	27	600	E4	32

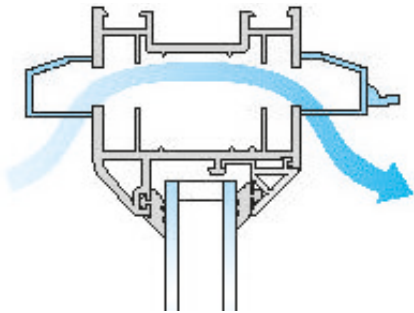

Sizes & Air Flow

VENT SIZE (mm)	AIR FLOW (mm²)		SLOT SIZE (LENGTH-GAP-LENGTH)(mm)	
	INTERNAL	EXTERNAL	INTERNAL	EXTERNAL
305	1800	2500	243	265
400	2700	3200	163-15.5-163	157-10-175
550	3400	4200	243-15.5-243	250-10-250

