

PRODUCT INFORMATION

Stay-Guard provides a simple and effective way to enhance window security. This hinge-protection device can be fitted to PVCu windows to defend all types of stays against attack, including standard, egress and easy-clean window hinges. The Stay-Guard goes beyond meeting PAS 24 requirements to give you the ultimate security performance.

- Achieves hook engagement twice that of rival products for greater protection
- Made from high-tensile steel in the UK
- 240 hours salt spray
- Stay-Guard should be fitted into reinforcement no less than 10mm from the edge of the sash to achieve the best performance
- Available in various sizes to suit different stack heights

Tip: We recommend you fit the Stay-Guard using 4.8 x 25mm pan head carbon steel zinc coated screws (not included). For the correct Stay-Guard for your profile system, please check our website.



PART NUMBERS



	Standard	Type A	Type B
13mm	GTS20013	GTS20013A	-
17mm	GTS20017	GTS20017A	GTS20017B
Box Qty	200	200	200

INSTALLATION GUIDANCE



Fit Stay-Guard approx 75mm centres from the internal corner as shown here

Fit run up blocks on opposite side to the Stay-Guard and pack the unit at the same positions marked * to stop sash movement

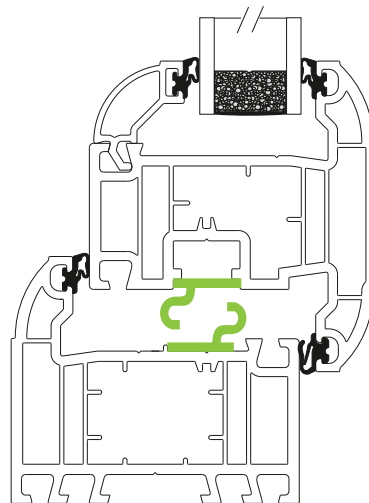

GUARANTEES

