

FB-6300 and FB-6400 20mm Wide Flush Bolts




PRODUCT INFORMATION



These finger-operated shoot bolts work to secure the slave leaf on double aluminium door assemblies. They are rebated into the leading edge or inside face of the door and operated by a lever which sits flush when the bolt is engaged and the door is closed. To ensure ease of operation, Axim FB series flush bolts have a deep finger recess and large lever. A standard installation requires two flush bolts morticed into the top and bottom of the door. For maximum security the Axim flush bolt has a hardened steel bolt, zinc plated with an anti-rattle sleeve.

- Hardened steel zinc plated bolt with anti-rattle sleeve
- 18mm bolt stroke
- 7mm zinc plated steel rod with fully threaded length for easy adaption to non-standard door installations
- Length: 110mm or 230mm
- "Centre Punch" tip to mark centre of keep
- Die cast zinc alloy body mechanism
- Fixing holes tapped M5
- Fixings included
- Manufacturer's guarantee: 30 months
- Deep finger recess and large lever for ease of operation
- Available in 20mm widths

TECHNICAL DRAWINGS

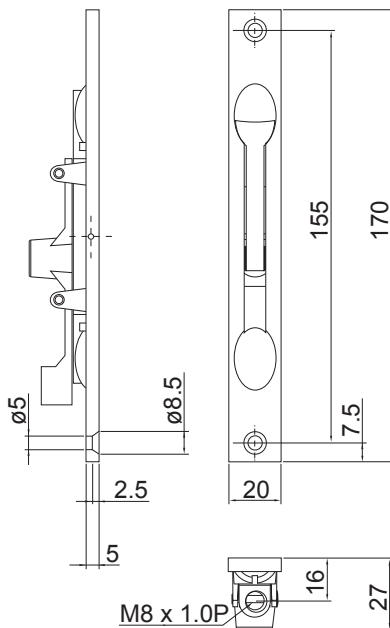

PART NUMBERS

Type	Width	Rod Length	Part Code	Box Qty
FB-6400	20mm	110mm	AFB64110	10
FB-6300	20mm	230mm	AFB64230	10



FB-6200 Series Flush Bolt Extension Rods

PRODUCT INFORMATION



These extension rods work with the Axim FB-62 Series Flush Bolts to accommodate taller doors.

- Choose from 20" or 36" lengths
- 30 months manufacturer's guarantee

PART NUMBERS

Bar Length	Part Code
20 inch	AFB62200
36 inch	AFB62360



Flush Bolt Sprung Loaded Socket Keep

PRODUCT INFORMATION



This floor socket keep works with Axim FB-6200 and FB-6000 series flush bolts.

- Sprung loaded
- Dust resistant
- Satin chrome finish
- 30 months manufacturer's guarantee

PART NUMBERS

Height	Top Diameter	Bottom Diameter	Part Code
465mm	35mm	21.2mm	AFB62035