

Delta Door Hinge

**WINDOW
WARE**

We've got it

DELTA

Simple Fabrication

Packed in trays of 3 and supplied in 5 parts, speeding up the fitting

Secure

Meets the requirements of PAS24

Non Drop

Designed specifically to minimise likelihood of dropping

Common Profile Upstand Stocked

Available in 21mm upstand

High Performance

Meets the requirements of PAS24

Tested to 100,000 cycles

Tested to 100 kg with 3 hinges

Satin Finish - Meet the requirements of BS EN1670:2002 - Grade 4. Providing 240 hours corrosion resistance

All Others - Meet the requirements of BS EN1670:2002 - Grade 5. Providing 480 hours corrosion resistance

Adjustments

Compression: +/-1mm

Height: +4mm or -1mm

Lateral: +/-5mm

A Solid Installation

Hinge cover protects and provides an adjustment guide

4mm key provided for vertical, horizontal & compression adjustments


Sash cover slides into place, hiding any fixings

A Match Made In Heaven

Matching cover caps for a seamless finish



White



Satin
Silver




Chrome




Anthracite
Grey
RAL7016



Brown



Black



PVD Gold

Delta Door Hinge



DELTA

Ordering Details



UPSTAND	WHITE	SATIN SILVER	CHROME	ANTHRACITE GREY RAL7016	BROWN	BLACK	PVD GOLD	BOX QTY.
21mm	HIN25150	HIN25151	HIN25152	HIN25153	HIN25155	HIN25156	HIN25158	12


NB: If you require a hinge jig, please order HIN25999

Packaging

Box quantity of 12.

Within the outer box there are four trays manufactured from recycled material, each containing 3 of the hinges.

Each component is arranged neatly in the tray that has been designed to make fitting the hinge as quick and easy as possible.

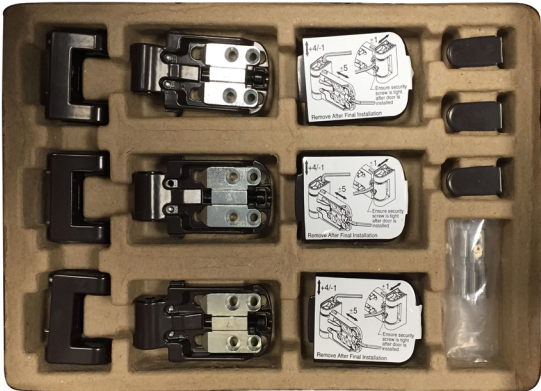

Technical Information

Corrosion

500 hours of corrosion resistance

Endurance

Tested to 100,000 cycles

Load

Tested to 100kg with 3 hinges

Performance

Meets the requirements of PAS24 when used as part of a compliant door set

Materials

Hinge Frame, Leaf & Cover: Zinc Alloy

Hinge Pin & Screws: Stainless Steel

Maintenance

The hinge should be cleaned periodically with warm water and a cloth only. We also recommend lightly lubricating the hinge annually.

Please note coastal or industrial areas may require the above maintenance more regularly.

